



LOCAL MUNICIPALITY – UMKHANDLU WENDAWO
SUPPLY CHAIN MANAGEMENT UNIT
259 KINGSWAY STREET, BERGVILLE, 3350
Tel: 036 448 8000 Ext. 8054 Fax: 036 448 1986/ 0867741577

Reference no: SCM151/2015 -2016

Date: 03 May 2016

RFQ: TO SUPPLY AND DELIVERY OF CUTTING EQUIPMENT

Quotations are hereby invited from interested contractors with a proven track record in terms of Section 83 of the Municipal System Act, Act 32 of 2000 (as amended) and Section 110 and 112 of the Municipal Finance Management Act, Act 56 of 2003, for supply and delivery of Cutting equipment.

- 1x Emergency Service Saw with all attachments**
- 4x Emergency Service Saw Blades**
- 1x Cut-Off machine**
- 4x Cut-Off machine “steel” blades**
- 2x brush Cutters “FS560C-EM” minimum**
- 4x Spare Blades**

The details of the specification attached:

For more information the following municipal official can be contacted during office hours:
Mr Freddie Halgreen @ 071 168 3260

QUOTE SUBMISSION

Quotations must be done on the company's letter head/ stamped, can only be submitted on a sealed envelope clearly marked the abovementioned reference number to Municipal tender box, not later than **12 May 2016 at 11:00**.

The following conditions will apply:

- Suppliers must be registered at our database; forms can be e-mailed on request, downloaded from our website and collected at our municipal offices.
- Suppliers must also ensure that they submit their tax clearance and B-BBEE certificates that are still valid as they will have a big impact during the evaluation processes
- Quotes will be evaluated on the 80/20 preferential points.
- Suppliers must also state the delivery period after receiving the initial order.
- Declaration of interest (MBD4 form) is compulsory to be attached with the quotation.

NO QUOTATION WILL BE CONSIDERED FROM PEOPLE IN SERVICE OF THE STATE.

Emergency Services Saw.



2

Emergency services saw

- For emergency operations and fire fighting
- Special saw chain with carbide alloy plating
- Tremendous performance in the medium rpm range

MS 461-R
CE




NEW

78.5 cm³, 4.4 kW/6.0 hp, 7.2 kg*. For emergency operations and fire fighting. Additional handle for quick and easy adjustment of the cutting depth, large starter grip and decompression valve for safe and easy chain saw starting, special saw chain plated with impact-resistant carbide plates.

Bar length 50 cm Order No. [REDACTED]

Emergency services saw conversion kit

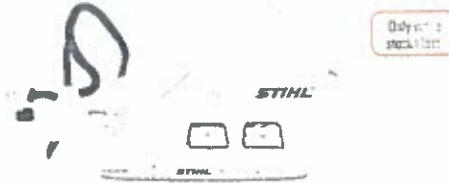

Only with stock list

For existing 044-, MS 440-models (not 044 C with catalytic converter/MS 440-D)
Order No. [REDACTED]

For existing 046-, MS 460-models (not 046 C with catalytic converter/MS 460-D)
Order No. [REDACTED]

Emergency services saw accessories

[REDACTED] Rollomatic ES [REDACTED] Ematic Super) guide bar, 50 cm (with replaceable bar nose) (not pictured)
Order No. [REDACTED]


Rapid Duro R (special saw chain) (not pictured)
Order No. [REDACTED]



ULTRASONIC safety goggles (clear)
Order No. [REDACTED]

Cutt-Off Machines

TS 800

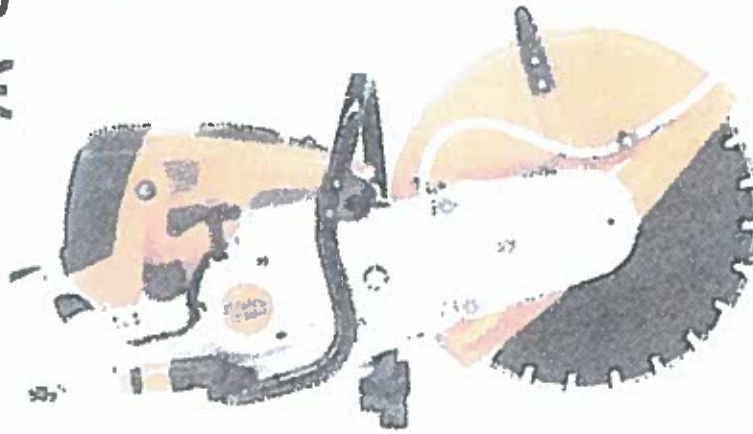

98.5 cm³, 5.0 kW/6.8 hp, 13.0 kg*. **TS 800** cut-off machine for 400 mm cut-off saw cutting wheels. Cut depth of 145 mm. Perfectly suited to the separating cut on the FW 20 cart. Equipped with decompression valve and **TS 800** ElastoStart for strength-saving start-up process and the long-life air filter system. Economically and environmentally-friendly 2-MIX engine.





Order No. **4224 011 2810** Spec for Cutt-Off Machine

11

Model	Order No.	Volume (cm ³)	Power (kW)	Weight (kg)	Stroke (mm)	Speed (rpm)	Max. Cut Depth (mm)	Max. Cut Width (mm)	Max. Cut Height (mm)	Max. Cut Diameter (mm)	Max. Cut Length (mm)	Max. Cut Thickness (mm)	Max. Cut Angle (°)	Max. Cut Material
TS 800	4224 011 2810	98.5	5.0	13.0	70	1100	145	400	145	145	145	145	145	145

* Product weight
 * Product weight
 * ElastoStart
 * Water pump
 * Wettable dust extraction
 * Max. cut depth to cut
 * Max. cut depth to
 * Max. cut depth to

Brush Cutter Spec.

<p>FS 410 C-E</p>  <p>41.6 cm³, 2.0 kW/2.7 hp, 8.5 kg*. For mowing tough grass. 4-point anti-vibration system, ErgoStart, multi-function handle, bike handle, tool-free adjustment, 2-MIX engine with ADVANCE PLUS universal harness.</p> <p>Order No. 4148 200 0045</p> <p>See the table on page 102 for further versions and saw versions.</p>	<p>FS 450 C-EM</p>  <p>45.6 cm³, 2.2 kW/3.0 hp, 8.5 kg*. For working in challenging areas of tough grass. 4-point anti-vibration system, ErgoStart, multi-function handle, bike handle, tool-free adjustment, 2-MIX engine, ADVANCE PLUS universal harness.</p> <p>Order No. 4148 200 0045</p> <p>See the table on page 102 for further versions and saw versions.</p>	<p>FS 490 C-EM</p>  <p>49.6 cm³, 2.4 kW/3.3 hp, 9.1 kg*. For professional use in landscape maintenance. 4-point anti-vibration system, ErgoStart, multi-function handle, bike handle, tool-free adjustment, 2-MIX engine, ADVANCE PLUS universal harness.</p> <p>Order No. 4148 200 0045</p> <p>See the table on page 102 for further versions and saw versions.</p>	<p>FS 560 C-EM</p>  <p>57.1 cm³, 2.8 kW/3.8 hp, 10.2 kg*. Strongest clearing saw. 4-point anti-vibration system, ErgoStart, multi-function handle, bike handle, tool-free adjustment, 2-MIX engine, ADVANCE PLUS universal harness.</p> <p>Order No. 4148 200 0045</p> <p>See the table on page 102 for saw versions.</p>
---	--	--	---



Electric brushcutters

- Light and comfortable handling
- For use around the house and garden
- For use in noise-sensitive residential areas and around hospitals, cemeteries, schools, etc.
- Especially well suited to mowing around stones, plants, flower pots and other obstacles



When working with clearing saws, you must wear complete face protection (visor), as well as safety glasses

Well protected

→ More on page 237

STIHL professional tip:



Pay attention to the varying shaft lengths on certain models. For users of different heights we offer clearing saw models with short shafts (K) and long shafts (L).

Personal protective equipment suitable for use with clearing saws can be found on pages 239 and 244/244.

*Including fuel, diverter and guard